

Europäisches Patentamt

European Patent Office

Office européen des brevets



(11) EP 0 856 333 A2

(12)

EUROPEAN PATENT APPLICATION

(43) Date of publication: 05.08.1998 Bulletin 1998/32

(51) Int. Cl.⁶: **A61N 1/372**, A61B 5/00

(21) Application number: 98100848.5

(22) Date of filing: 19.01.1998

(84) Designated Contracting States:

AT BE CH DE DK ES FI FR GB GR IE IT LI LU MC NL PT SE

Designated Extension States:

AL LT LV MK RO SI

(30) Priority: 30.01.1997 IT MI970178

(71) Applicant: Ela Medical S.P.A. 20090 Segrate (Milano) (IT)

(72) Inventors:

- Rognoni, Giorgio 28100 Novara (iT)
- Bottazzi, Marco 27042 - Bressana Bottarone (PV) (IT)
- Voltan, Gianfranco
 20020 Arese (Milano) (IT)
- (74) Representative:

Petruzziello, Aldo et al Racheli & C. s.r.l. Viale San Michele del Carso, 4 20144 Milano (IT)

(54) Transtelephone system for monitoring and programming implantable cardiac pacemakers and defibrillators

(57) A transtelephone system for monitoring and programming implantable cardiac pacemakers and defibrillators comprising at least one remote station (1) connected to a programming head (10) of a cardiac pacemaker capable of receiving the operating parameters of an implanted cardiac pacemaker or defibrillator

and a local station (2) connected by means of telephone lines (8,8',20), for transmission of the parameters thus obtained from said at least one remote station (1) to said local station (2).

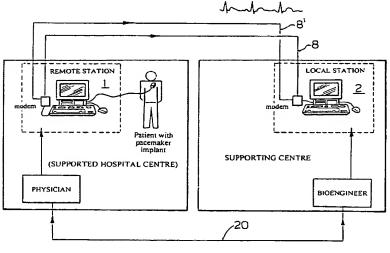


FIG.1

10

Description

The present invention relates to a transtelephone support system for monitoring and programming implantable cardiac pacemakers and defibrillators.

What is meant by transtelephone support system is a telematic system which, besides offering cardiac pacemaker clinics a telephone help line, provides a further connection which allows the parameters on which to intervene, read on implanted cardiac pacemakers and defibrillators, to be viewed at the same time by medical personnel and by a technical expert such as a bioengineer, for example.

The support systems used to date provide either solely a telephone help line or, when required, the presence of a bioengineer.

These systems have the obvious drawback of offering a service limited to use of the telephone line only and require the physical presence of a bioengineer if the medical personnel consider it appropriate.

The object of the present invention is to eliminate the above drawbacks, providing a transtelephone support system which, though ensuring a complete service, does not require the physical presence of the bioengineer, allowing an obvious reduction in intervention time, and the possibility of offering support and care in a plurality of centres, even located in different cities.

These and other objects are achieved with a transtelephone support system for programming cardiac pacemakers, according to the invention, which has the characteristics listed in claim 1.

Preferred embodiments of the invention emerge from the dependent claims.

Substantially, the system according to the invention proposes a structure that makes it possible to provide complete remote support, allowing the data for analysis to be viewed both by the physician and by the bioengineer.

Further characteristics of the invention will be made clearer by the detailed description that follows, referring to a purely exemplary and therefore non-limiting embodiment thereof, illustrated in the appended drawings, in which:

Figure 1 is a connection structure for transtelephone support in which are shown both a local station in the assisting centre and a generic remote station in the assisted centre connected to each other by both a telephone line and a transtelephone data transmission line, as well as a line for possible transmission of a surface ECG signal (electrocardiographic tracing),

Figure 2 shows a local station in detail,

Figure 3 shows a generic remote station in detail,

Figure 4 shows the flow chart for a of transtele-

phone support session for programming a cardiac pacemaker,

Figure 5 shows a star diagram of a transtelephone support system according to the invention, with a local supporting station and different remote stations situated in different supported hospitals.

In figure 1 the transtelephone support system according to the invention is shown in general, where a remote station 1 is shown at a hospital where the service for reading and monitoring of the adjustment data of implantable cardiac pacemakers and defibrillators is carried out, and a local station 2, at the supporting centre where the transtelephone support service is carried out. It shows how the medical personnel can interact with the bioengineer through a telephone line 20 possibly using the toll-free line made available by the supporting centre. Furthermore, after the data have been read from the patient's cardiac pacemaker they are transferred, possibly together with a surface ECG signal (electrocardiographic tracing), through telephone lines 8 and 8', from the remote station 1 where the medical personnel operate, to the local station 2 for support, including visual support, to the bioengineer of the patient's general condition to guide and recommend the choice of parameters that might be modified.

In Figure 2 a local station 2 at a supporting centre is shown in detail, in its constituent parts, comprising a computer 3 in which a program 5 for management of the data to be received from the remote station 1 and the transtelephone support conditions in connection with a monitor 4 for displaying them and printer 7 for reproducing them as hard copy. Furthermore, the computer 3 is connected to a modem 6 in turn connected to a through telephone line 8 to allow connection to different remote stations 1.

In Figure 3, on the other hand, a remote station 1, at a supported centre, is shown in detail that has a similar structure to that of the local station 2, with a computer 30, with a program 50 installed to interrogate the cardiac pacemaker and for management of the data to be sent to the local station 2 and of the transtelephone support connections, a monitor 40, a printer 70 and a modem 60 connected to a through telephone line 8.

For reading of the parameters to be examined, the programming head of the cardiac pacemaker 10 which is set up to record the data of the cardiac pacemaker implanted in the patient is connected to the computer 30.

After having been displayed on the monitor 40 of the remote station 1, these data are sent to the local station 2 via the through telephone line 8, to be displayed on the monitor 4 thereof.

In addition, if the telephone line 20 is not available for an audio connection, the possibility is foreseen of transmitting messages in real time by means of the through telephone line 8.

50

55

10

15

30

35

45

50

With the system according to the invention, therefore, both the bioengineer and the medical personnel have the same information displayed; thus the bioengineer can recommend any changes that the medical personnel can decide to make to the cardiac pacemaker, as though he were present.

In Figure 4 a flow chart is shown for the entire remote support session for programming of a cardiac pacemaker in which the sequence for making the connection between the remote station 1 and the local station 2, which is repeated until the connection has been made, is illustrated in part A; part B is that concerning interrogation of the cardiac pacemaker by the programming head 10, which is repeated until it has been completed, in part C the sequences are shown for first defining and then carrying out programming of the parameters or functions of the cardiac pacemaker.

For safety reasons, programming of the programming head of the cardiac pacemaker 10 is carried out when this is not in contact with the cardiac pacemaker, and to prevent any programming confirmation maneuver on the cardiac pacemaker by the local station 2. When programming has been agreed with the bioengineer, the programming head is brought close to the cardiac pacemaker for confirmation of the parameters decided.

Figure 5 shows the structure of a star-type connection of the local station 2 for transtelephone support with different remote stations 1a, 1b, 1c etc., in respective supported centers, which highlights the versatility of the remote assistance system according to the invention which can provide connections with different hospitals through telephone line connections, ensuring ample coverage even for stations that are physically distant from the local station 2.

Claims

- A transtelephone support system for controlling and programming implantable cardiac pacemakers and defibrillators comprising at least one remote station

 (1) at a supported center connected to a programming head (10) of a cardiac pacemaker, used to receive the operating parameters of an implanted cardiac pacemaker or defibrillator, and a local station (2) at a supporting centre connected by means of telephone lines (8, 8', 20).
- A system according to claim 1, characterized in that an audio connection by means of a telephone line (20) is provided between said supported centre and said supporting centre.
- 3. A system according to claim 1 or 2, characterized in that the parameters acquired from the cardiac pacemaker by said at least one remote station (1) are transmitted to said local station (2) by means of a through telephone line (8).

- A system according to claim 3, characterized in that said through telephone line (8) is also used for transmitting messages.
- 5. A system according to any one of the preceding claims, characterized in that said local station (2) comprises a computer (3) that contains a program (5) for management of data and of said system on the station (2), a monitor (4) to display the data to be processed, a modem (6) for the connection to said one through telephone line (8).
 - 6. A system according to any one of the preceding claims, characterized in that said remote station (1) comprises a computer (30), which contains a program (50) for interrogating the cardiac pacemaker, for management of the data and of said system on the station (1), a monitor (40) to display the data for processing, a modem (60) for connection to a through telephone line (8) and a programming head for cardiac pacemakers or defibrillators (10).
 - A system according to any one of the preceding claims, characterized in that it also provides for transmission of a surface ECG signal from said at least one remote station (1) to the supporting station (2).
 - A system according to claim 7, characterized in that said surface ECG signal is transmitted on a separate telephone line (8').



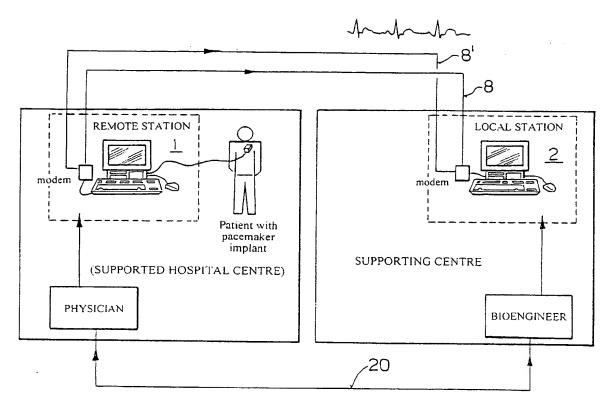


FIG.1

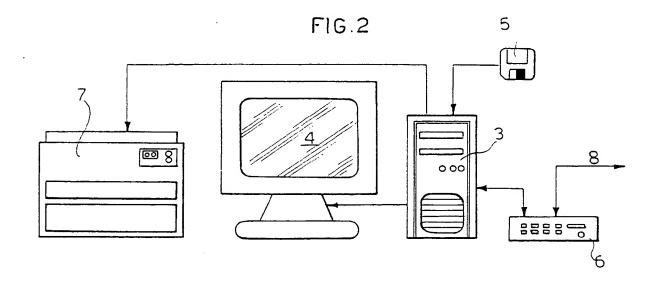

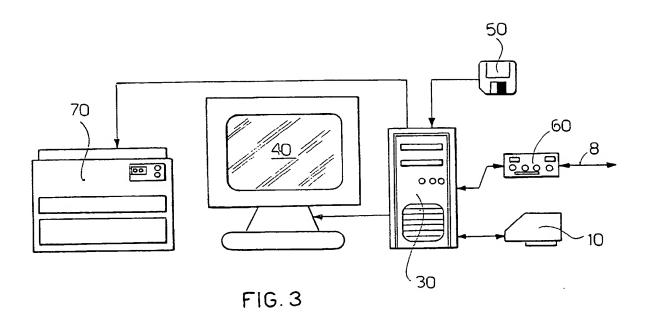


Remote Station 1b Remote Station 1c Hospital Centre 1b Remote Station 1a Hospital Centre 1c Hospital Centre 1a Remote Station 1d TRANSTELEPHONE Remote Station In Hospital Centre 1d SUPPORT STATION Hospital Centre In Remote Station 1e Remote Station.... Hospital Centre le

Remote Station 1f

Hospital Centre 1f

FIG.5

Hospital Centre.

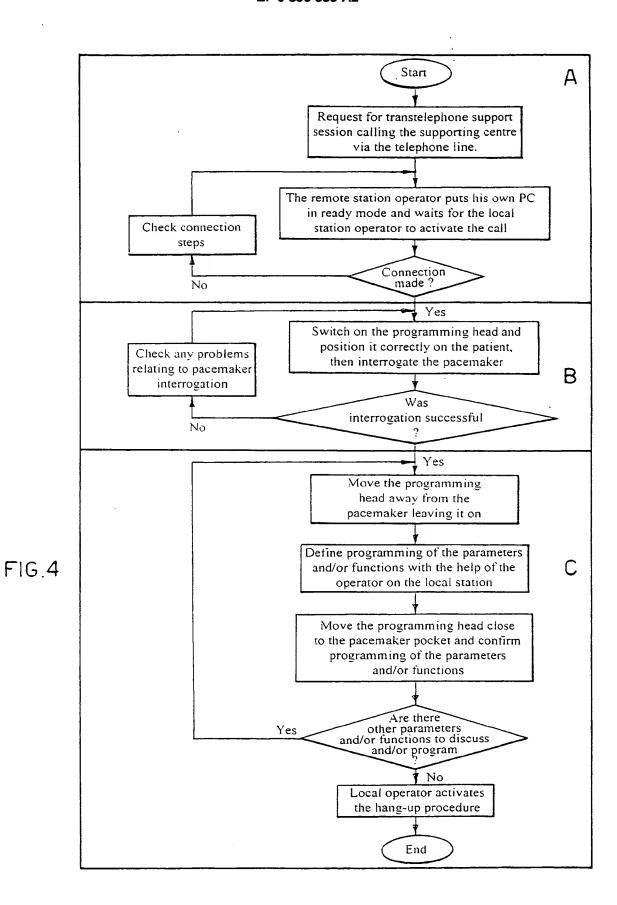

6



Europäisches Patentamt

European Patent Office

Office européen des brevets



(11) EP 0 856 333 A3

(12)

EUROPEAN PATENT APPLICATION

(88) Date of publication A3: 12.05.1999 Bulletin 1999/19

(51) Int. Cl.⁶: **A61N 1/372**, A61B 5/00

(43) Date of publication A2: 05.08.1998 Bulletin 1998/32

(21) Application number: 98100848.5

(22) Date of filing: 19.01.1998

(84) Designated Contracting States:

AT BE CH DE DK ES FI FR GB GR IE IT LI LU MC NL PT SE
Designated Extension States:
AL LT LV MK RO SI

(30) Priority: **30.01.1997 IT MI970178**

(71) Applicant: Ela Medical S.P.A. 20090 Segrate (Milano) (IT)

(72) Inventors:


- Rognoni, Giorgio 28100 Novara (IT)
- Bottazzi, Marco 27042 - Bressana Bottarone (PV) (IT)
- Voltan, Gianfranco 20020 Arese (Milano) (IT)
- (74) Representative:

Petruzziello, Aldo et al Racheli & C. s.r.l. Viale San Michele del Carso, 4 20144 Milano (IT)

(54) Transtelephone system for monitoring and programming implantable cardiac pacemakers and defibrillators

(57) A transtelephone system for monitoring and programming implantable cardiac pacemakers and defibrillators comprising at least one remote station (1) connected to a programming head (10) of a cardiac pacemaker capable of receiving the operating parameters of an implanted cardiac pacemaker or defibrillator

and a local station (2) connected by means of telephone lines (8,8',20), for transmission of the parameters thus obtained from said at least one remote station (1) to said local station (2).

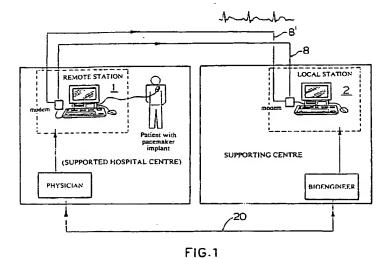

Printed by Xerox (UK) Business Services 2.16.7/3.6



EUROPEAN SEARCH REPORT

Application Number

EP 98 10 0848

	DOCUMENTS CONSIDE Citation of document with ind		Relevant	CLASSIFICATION OF THE
Category	of relevant passag		to claim	APPLICATION (Int.Cl.6)
Х	US 5 336 245 A (ADAM 9 August 1994 * the whole document	S THEODORE P ET AL) *	1-6	A61N1/372 A61B5/00
Α	EP 0 472 411 A (TELE 26 February 1992 * the whole document		1-8	
Α	WO 96 09614 A (ZIEGR STEVEN CHRISTOPHER (* the whole document		1-8	
Α	US 5 586 556 A (SPIV 24 December 1996 * abstract; figure 1		1-8	
A	US 4 531 527 A (AUER 30 July 1985 * abstract; figure 1	RBACH ALBERT A ET AL)	1-8	
				TECHNICAL FIELDS SEARCHED (Int.Cl.6)
				A61N
				A61B
1				
	The avance of the second secon	hoon drawn up for all claims	_	
	The present search report has	Date of completion of the search		Examiner
	THE HAGUE	18 March 1999	Fe	errigno, A
	CATEGORY OF CITED DOCUMENTS	T: theory or prince	iple underlying the	ne invention
X : p d to r	particularly relevant if taken alone	E : earlier patent after the filing	document, but pu date	blished on, or
Y:p	particularly relevant if combined with another comment of the same category		d in the applicati	
A:te	echnological background non-written disclosure	& ; member of the		mily, corresponding
P:u	ntermediate document	document		

ANNEX TO THE EUROPEAN SEARCH REPORT ON EUROPEAN PATENT APPLICATION NO.

EP 98 10 0848

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report. The members are as contained in the European Patent Office EDP file on The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

18-03-1999

	Patent documen ed in search rep		Publication date		Patent family member(s)	Publication date
US	5336245	Α	09-08-1994	NONE		
EP	0472411	Α	26-02-1992	US	5113869 A	19-05-199
WO	9609614	Α	28-03-1996	US AU		08-04-199 09-04-199
US	5586556	Α	24-12-1996	NONE		
US			30-07-1985	WO AU EP	8303744 A 8526582 A 0108052 A	10-11-198 21-11-198 16-05-198

THIS PAGE BLANK (USPTO)